


Kolster-Brandes

156 PORTABLE RECEIVER


Drawing by Mike Edwards

Note.
 For twin HT use, connect HT1 & HT2,
 for single HT use add R4 and use 90V to HT3

The supply voltages indicated were those used
 for testing, not necessarily what was specified.

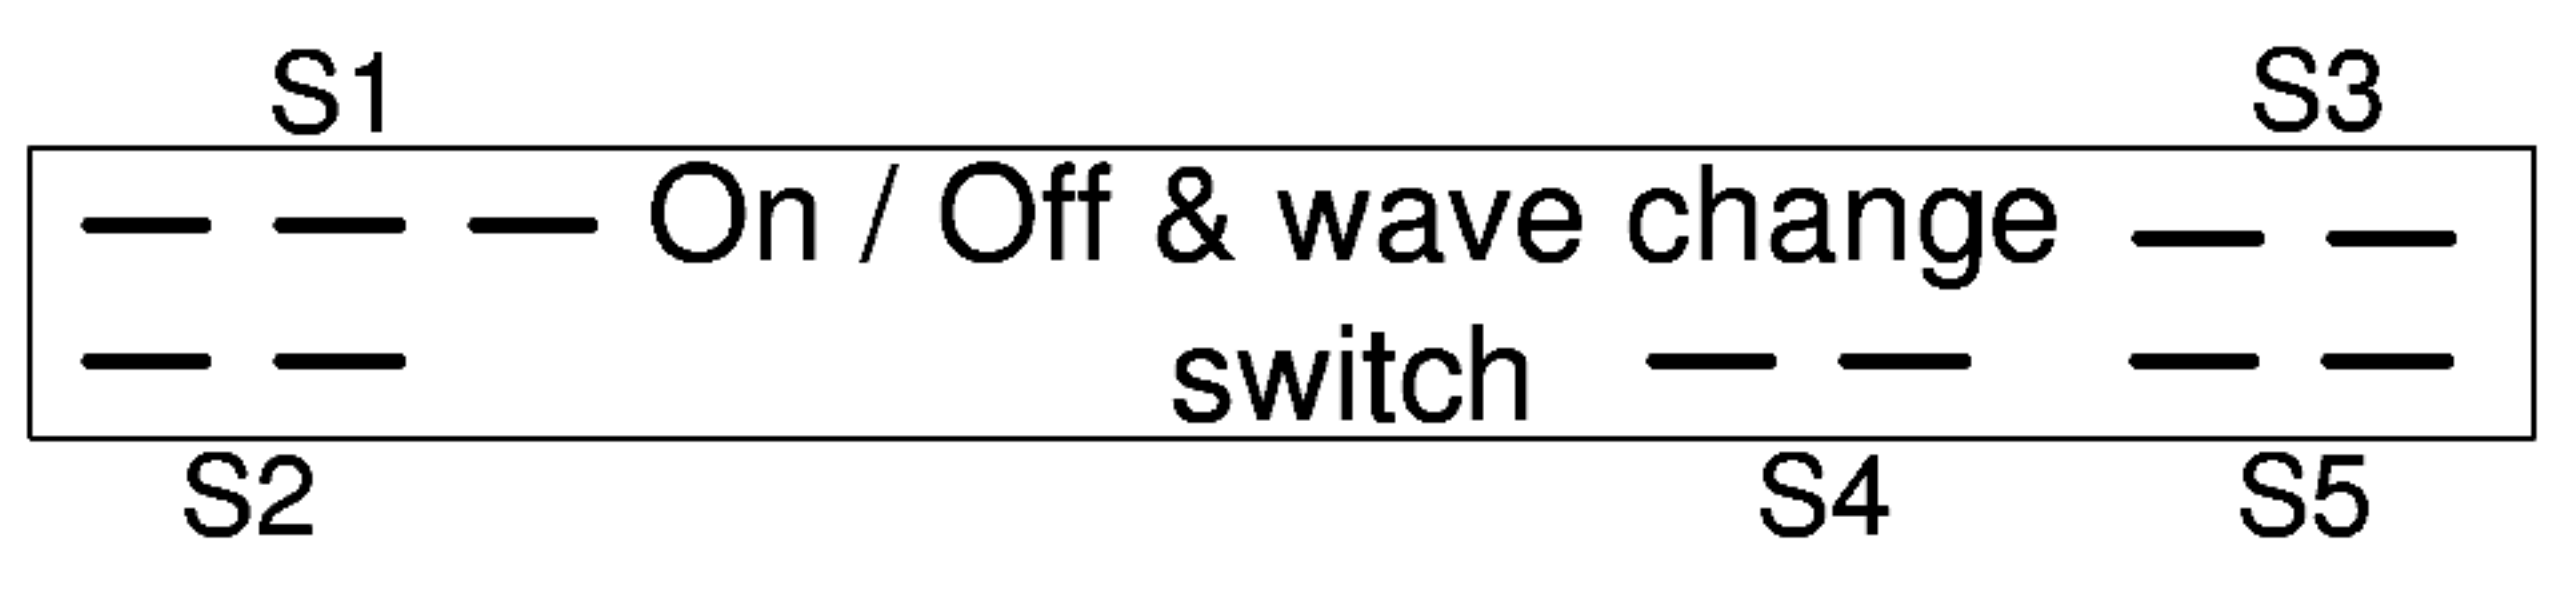


K&B Museum.org.uk

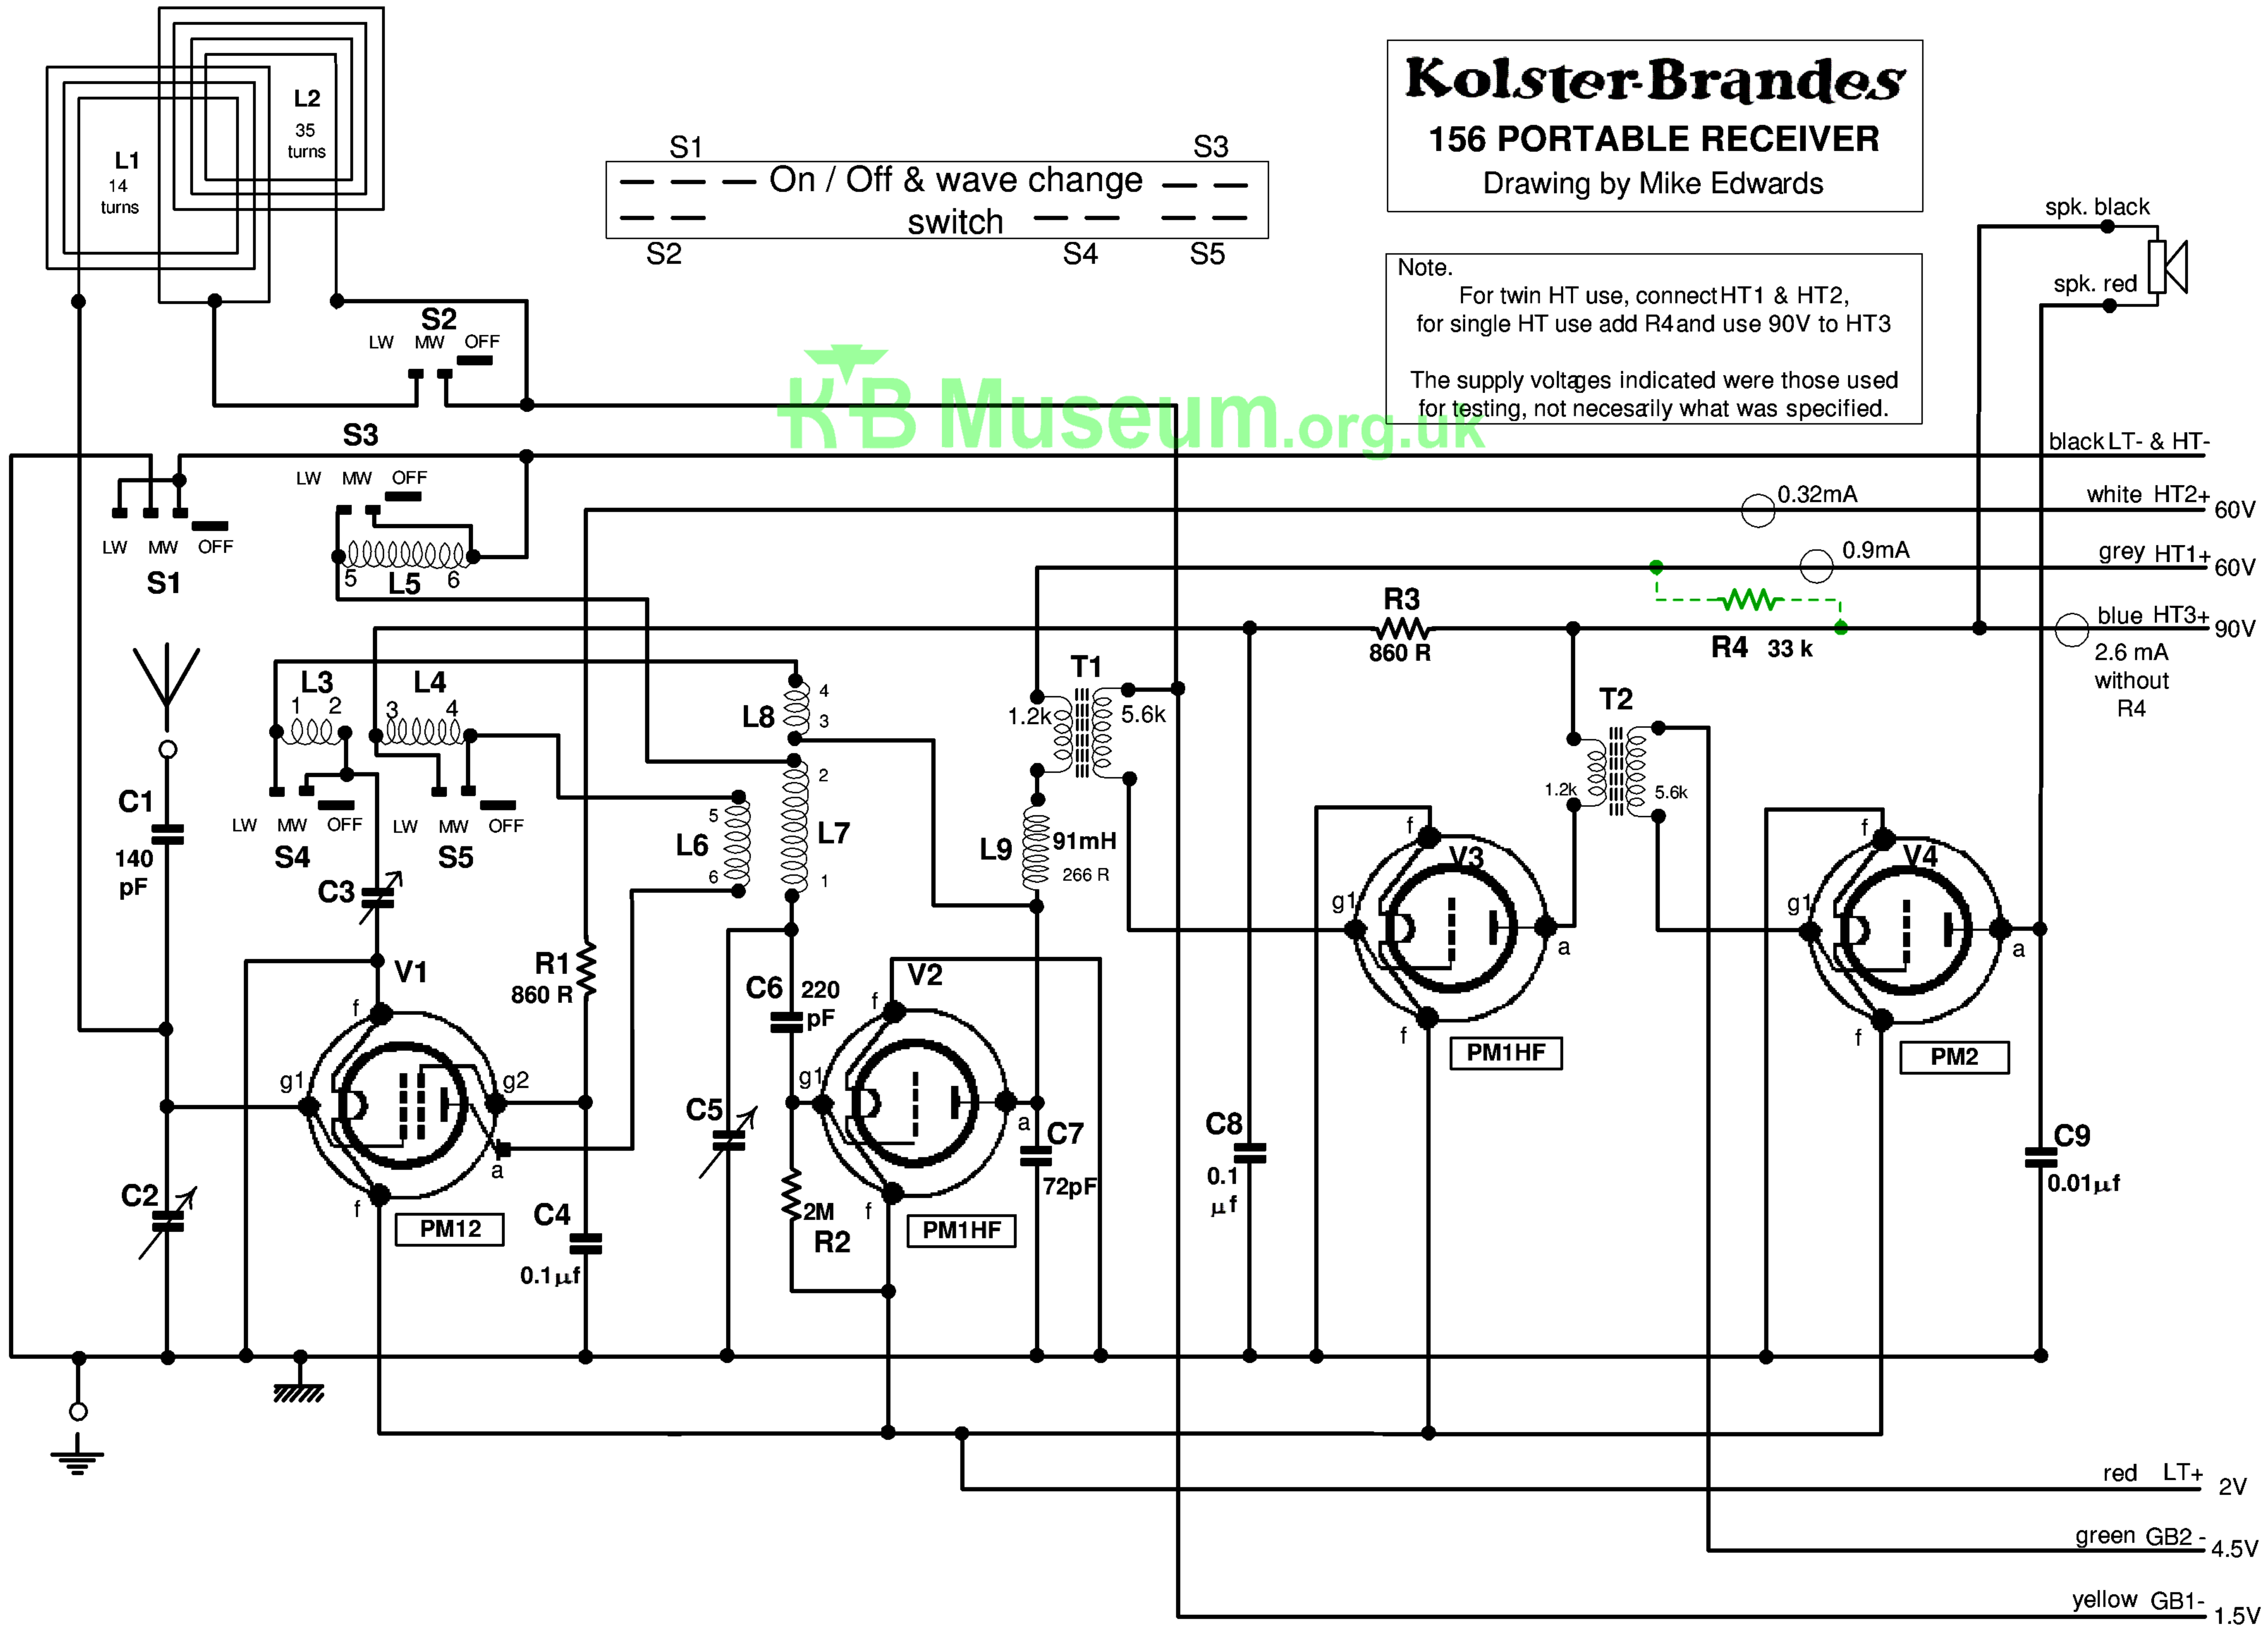

red LT+ 2V
 green GB2- 4.5V
 yellow GB1- 1.5V

L1 common L2 (in lid)

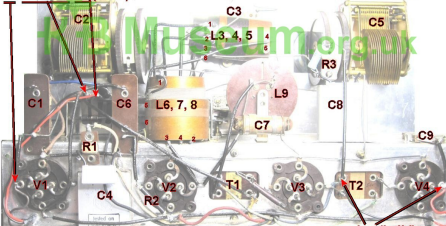

speaker (in lid)