


**CRTS**

KG022

ADDENDUM SHEET TO G.C.2  
SERVICE MANUAL  
K.B.  
MODEL KG022

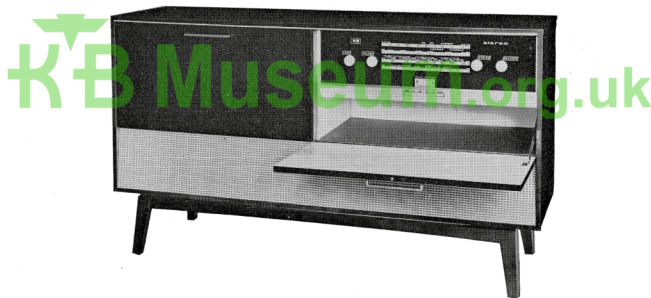

A DIVISION OF **STC**

Issued FEBRUARY 1965

COMBINED RADIO AND TELEVISION SERVICE LTD

REGENT WORKS, SIDCUP, KENT. Tel: FO0tscray 3333

SERVICE ORGANISATION FOR K.B. · REGENTONE · R.G.D. · ACE · ARGOSY

ALSO PROVINCIAL DEPOT AT

COLLEGE MILTON

EAST KILBRIDE

GLASGOW

EAST KILBRIDE 25101

**Dimensions :**

Height —	28"
Width —	48"
Depth —	16"
Weight —	96 lbs.

---

DESCRIPTION	PART/LOC. No.
Cabinet (Medium)	815/220/21660
Cabinet (Light)	815/220/1/21674
Cabinet Back	814/150/1/21303
Back Panel (Record Changer Compartment)	815/223/21675
Knobs (Four)	35/247/01048
Calibrated Scale	44/32/11167
Speaker (2 off 10" x 6")	11/123/03135
Tweeters (2 off 4")	11/152/03142
Record Changer "Autoslim" (Garrard)	37/30/19640
P.U. Cartridge (Stereo)	GP83/2/19241
Styli LP	GP83/LP/19623
Styli Std.	GP83/78/19624
Push Button Escutcheon	35/182/13611
K.B. Badge	21/117/13680
FM Plug (Black)	13/201/25275
Speaker Plug (Red)	13/201/2/25269
Speaker Plug (Brown)	13/201/1/25268
2 MFd 12V Reversible Electrolytic Capacitor	KEM225/08397

---



---

**Chassis Removal Instruction :**

Pull off knobs, then remove two 4BA screws at rear of chassis and the screws through the brackets on either side of the chassis (near the front). The chassis can then be withdrawn.

Access to the underside of the Record Changer is obtained by removing the record changer compartment back cover and releasing the transit screw retaining clips.

Cartridge loading is achieved by two 1000pF capacitors which are connected across each of the stereo outputs on the tag panel mounted on the changer.

---

N.B. Later versions will be fitted with a GP 81 P.U. cartridge, and the two cartridge loading capacitors deleted.